


Model 3100-LP



HP/KW	38/28.2
SWEEP OF DISCS	28" (711 mm)
ABRASIVE PRESSURE	1160 lbs (526 kg)
STONE HOLDER RPM	460
WIDTH OF MACHINE	29-1/2" (749 mm)
LENGTH OF MACHINE	72-1/4" (1835 mm)
HEIGHT OF MACHINE	58-1/2" (1486 mm)
NET WEIGHT	1500 lbs (680 kg)
SHIPPING WEIGHT	1675 lbs (760 kg)
WATER TANK	20 gallon (75,7 L)
CLUTCH	Heavy Duty Disc Type
LP TANK	33# HORIZONTAL

- Optimal for jobs exceeding 10,000 sq. ft.
- Despite the weight and size the 3100 can be easily maneuvered by a single person
- Heavy Duty Disc Type Dry Clutch
- Belt Driven
- Four 42 lbs. Pocket Weights
- Mild Steel or Stainless Steel Guards
- Stainless Steel Water Tank
- Wet/Dry Setup
- Uses Plug Stone Shape, Bolt on to Universal Tool Plate, or Speed Shift System

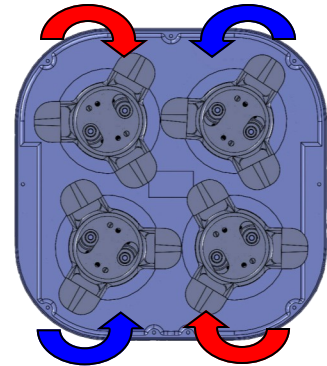

PRODUCTION RATES

- Mastic removal rate of 1000 sq. ft. per hour
- Thin-Set removal rates of 1,500 sq. ft. per hour
- Thin-Mil coatings removal of 750 sq. ft. per hour
- Concrete polishing rates of 2,500 sq. ft. per polishing pad per hour (depending on grit)
- Rough Terrazzo rate of 1,500 sq. ft. per day



222 1st Avenue NW • Watertown, SD 57201
 Phone: (605) 882-3888 • Fax: (605) 882-0778
 Email: info@terrco.com • Website: www.terrco.com

